


User manual for remote controlled indoor outlet





- Användarmanual för inomhus uttag
- Käyttäjän opas sisäpistorasia
- Benutzerhandbuch für Innensteckdose



You can also read the manual online.
Just follow the link: tellus.us/m14190

1. Connect to a remote control*

- Koppla ihop med fjärrkontroll
- Liitä Kaukosäädin
- Eine Fernbedienung Anschliessen





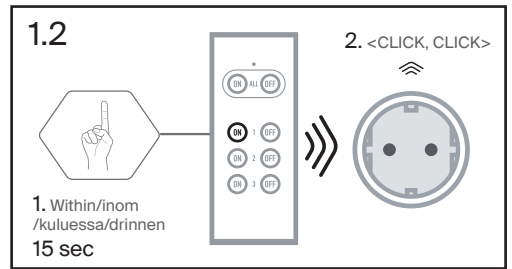
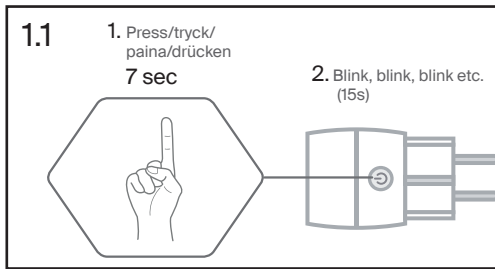


* Remote Control only included in selected packages/Fjärrkontroll ingår endast i utvalda paket/Fernbedienung nur in bestimmten Paketen enthalten/Kaukosäädin sisältyy vain valittuihin paketteihin.


2. Connect sensor to TellStick

- Koppla sensor till TellStick
- Liittää anturi TellStick:iin
- Sensor mit TellStick verbinden


Requires a TellStick and a Tellus Live account

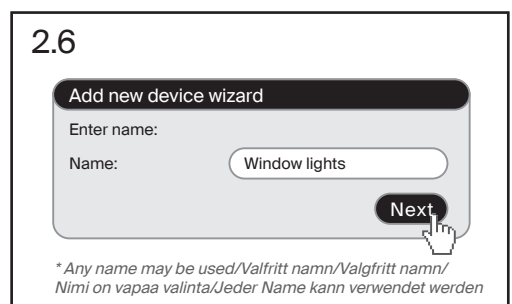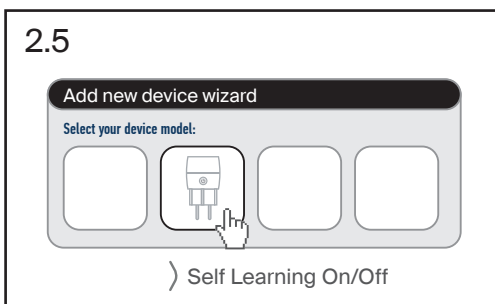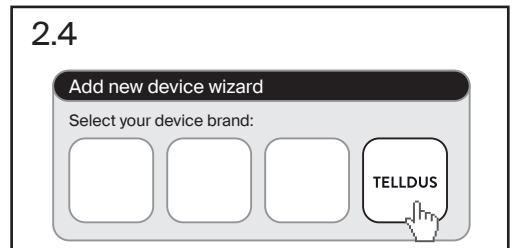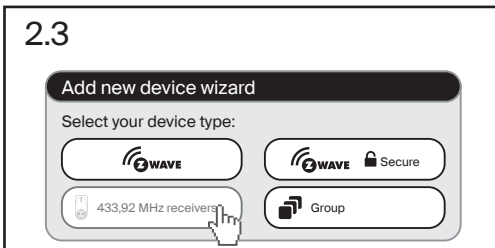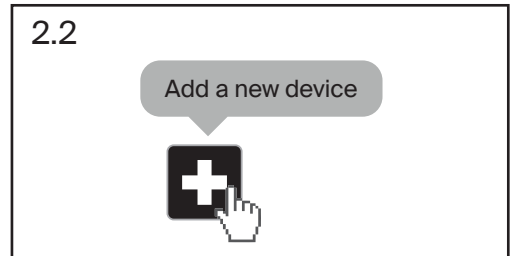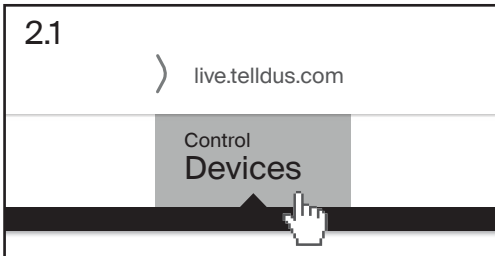

2.7



2.9

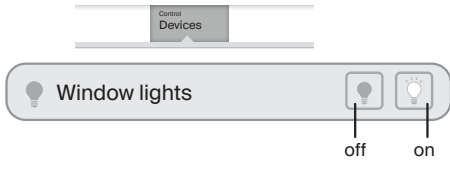

Read this before installation

Remote controlled outlets & remote control

- Remote control* has 3 channels and 1 group function.
- Each outlet has 5 memory settings.
- Blue LED indicates ON/OFF and programming status.

Installation

- Remove the plastic tab from the battery in the remote control*.
- Connect the outlet to mains power.
- Connect a lamp to the outlet. If there is a power switch on the connecting cable make sure it is switched on.

Unpair a single remote control* from an outlet:

- Keep the button on the outlet pressed for 7 seconds. The LED blinks slowly.
- Press the corresponding OFF button on the remote control* to remove the learned code (the learning mode is automatically disabled after 15 seconds if no button is pressed).
- The connected lamp blinks three times as confirmation.

Unpair all remote controls* from an outlet:

- Keep the button on the outlet pressed for 7 seconds. The LED blinks slowly.
- Within 7 seconds, press the button briefly once more (the learning mode is automatically disabled after 15 seconds if no button is pressed).
- The connected lamp blinks three times as confirmation.

Läs detta före installation

Fjärrstyrda uttag & fjärrkontroll*

- Fjärrkontrollen* har 3 kanaler och 1 gruppfunktion.
- Varje uttag har 5 minnesplatser.
- Blå lysdiod indikerar på/av och inlärningsstatus.


Installation

- Ta bort plastfliken från batteriet i fjärrkontrollen*.
- Anslut uttaget till ett eluttag.

2.8

Add new device wizard

1. Install the outlet as explained under "Installation" in the manual.
2. Keep the outlet programming button pressed for 7 seconds. The LED blinks slowly.
3. Press the learn button below within 15 seconds to link the outlet. (The programming mode is automatically disabled if no pairing signal is received.)
4. The connected lamp blinks three times as confirmation.



- Anslut en lampa till uttaget. Om det finns en strömbrytare på lampans kabel, kontrollera att den är påslagen.

Ta bort en inlärd fjärrkontroll* från ett uttag:

- Håll knappen på uttaget intryckt i 7 sekunder. Lysdioden blinkar långsamt.
- Tryck på kopplad OFF-knapp på fjärrkontrollen* för att ta bort den lärda koden. (Inlärningsläget avaktiveras automatiskt efter 15 sekunder om ingen knapp trycks in.)
- Den anslutna lampen blinkar tre gånger som bekräftelse.

Ta bort alla inlärd fjärrkontroller* från ett uttag:

- Håll knappen på uttaget intryckt i 7 sekunder. Lysdioden blinkar långsamt.
- Inom 7 sekunder, tryck kort på knappen en gång till. (Inlärningsläget avaktiveras automatiskt efter 15 sekunder om ingen knapp trycks in.)
- Den anslutna lampen blinkar tre gånger som bekräftelse.

Lesen Sie dies vor der Installation

Ferngesteuerte Steckdosen & Fernbedienung

- Fernbedienung* hat 3 Kanäle und 1 Gruppenfunktion.
- Jede Steckdose besitzt 5 Erinnerungs-Einstellungen.
- Blaue LED zeigt AN/AUS und Programmierstatus.

Installation

- Entfernen Sie die kleine Plastikschlaufe von der Batterie in der Fernbedienung*.
- Verbinden Sie die Steckdose mit einer Stromversorgung.
- Verbinden Sie eine Lampe mit der Steckdose. Wenn das dazugehörige Kabel einen Schalter besitzt, dann schalten Sie diesen auf Ein.

Verbindung einer einzelnen Fernbedienung* von einer Steckdose entfernen

- Drücken Sie den Knopf auf der Steckdose für 7 Sekunden. Die LED blinkt langsam.
- Drücken Sie den dazugehörigen AUS Knopf auf der Fernbedienung*, um den gelernten Kode zu entfernen (der Lernmodus wird nach 15 Sekunden automatisch deaktiviert, wenn kein Knopf gedrückt wird).
- Die verbundene Lampe blinkt als Bestätigung drei mal.

Verbindungen aller Fernbedienungen* von Steckdose trennen

- Halten Sie den Knopf auf der Steckdose für 7 Sekunden gedrückt. Die LED blinkt langsam.
- Drücken Sie den Knopf innerhalb von 7 Sekunden noch einmal kurz (der Lernmodus wird automatisch nach 15 Sekunden abgeschaltet, wenn kein Knopf gedrückt wird).
- Die verbunden Lampe blinkt als Bestätigung drei mal.

*Remote Control only included in selected packages/Fjärrkontroll ingår endast i utvalda paket/Fernbedienung nur in bestimmten Paketen enthalten

Specifications/Specifikationer/Spesifikationer/Tekniset tiedot

Article number/Artikelnummer/Artikkelnumero: 14190

Battery/Batteri/Batterie/Paristo: 3V CR2032

Max resistive load/Max resistiv belastning/Maximale ohmsche Last/Suurin resistiivinen kuorma: 3680 W

Range/Räckvidd/Soveltamisala/Aktionsradius: 0-30m

Protection class/Skyddsklass/Schutzklasse/Suojausluokka: IP20

Protection class / Skyddsklass / Schutzklasse: I

Frequency/Frekvens/Frequenz/Taajuus: 433.92 MHz

Operating temperature/Användningstemperatur/Betriebstemperatur/Käyttölämpötila: 0°C-35°C

Power supply/Strömförsörjning/Stromversorgung/Virtalähde: 230 V~, 50 Hz

Standby power/Standby-förbrukning/Ruheleistung/Valmiustila: <1 W

Correct disposal of the products



Within the European Union, this symbol indicates that the products must not be disposed in the household waste. Devices contain valuable recyclable materials that should be recycled for reuse and uncontrolled waste disposal may cause harm to the environment and human health. Please dispose the old products via suitable collection systems or send the unit to the office where you bought it. This will make the product recycling.

tellusTM

Proove Distribution AB
Birger Svensson Väg 34 B,
432 40 Varberg, Sweden
www.tellus.com • support.tellus.com